

Free multiflows in bidirected and skew-symmetric graphs

Maxim A. Babenko* Alexander V. Karzanov†

February 2, 2008

Abstract

A graph (digraph) $G = (V, E)$ with a set $T \subseteq V$ of terminals is called *inner Eulerian* if each nonterminal node v has even degree (resp. the numbers of edges entering and leaving v are equal). Cherkassky [1] and Lovász [15] showed that the maximum number of pairwise edge-disjoint T -paths in an inner Eulerian graph G is equal to $\frac{1}{2} \sum_{s \in T} \lambda(s)$, where $\lambda(s)$ is the minimum number of edges whose removal disconnects s and $T - \{s\}$. A similar relation for inner Eulerian digraphs was established by Lomonosov [14]. Considering undirected and directed networks with “inner Eulerian” edge capacities, Ibaraki, Karzanov, and Nagamochi [10] showed that the problem of finding a maximum integer multiflow (where partial flows connect arbitrary pairs of distinct terminals) is reduced to $O(\log T)$ maximum flow computations and to a number of flow decompositions.

In this paper we extend the above max-min relation to inner Eulerian *bidirected* and *skew-symmetric* graphs and develop an algorithm of complexity $O(VE \log T \log(2 + V^2/E))$ for the corresponding capacitated cases. In particular, this improves the bound in [10] for digraphs. Our algorithm uses a fast procedure for decomposing a flow with $O(1)$ sources and sinks in a digraph into the sum of one-source-one-sink flows.

KeyWords: bidirected graph, skew-symmetric graph, edge-disjoint paths, multiflow.

AMS Subject Classification: 90C27, 90B10

*Dept. of Mechanics and Mathematics, Moscow State University, Vorob'yovy Gory, 119899 Moscow, Russia, *email:* mab@shade.msu.ru. Supported by RFBR grants 03-01-00475 and NSH 358.2003.1.

†Institute for System Analysis, 9, Prospect 60 Let Oktyabrya, 117312 Moscow, Russia, *email:* sasha@cs.isa.ru. Supported by NWO–RFBR grant 047.011.2004.017.

1 Introduction

A graph (digraph) $G = (V, E)$ with a distinguished subset T of nodes is said to be *inner Eulerian* if each node $v \in V - T$ has even degree (resp. the indegree and outdegree of v are equal). The nodes in T and in $V - T$ are called *terminals* and *inner* nodes, respectively. A simple path in G is called a *T-path* if its ends are distinct terminals and the other nodes are inner. There is a nice max-min relation established by Cherkassky [1] and Lovász [15] for graphs, and by Lomonosov [14] for digraphs:

- (1) if (G, T) is inner Eulerian, then the maximum number $\nu_{G,T}$ of pairwise edge-disjoint T -paths is equal to $\frac{1}{2} \sum_{s \in T} \lambda_{G,T}(s)$.

Here and later on, for a subset X of nodes, $\delta(X) = \delta_G(X)$ denotes the set of edges with one end in X and the other in $V - X$, called the *cut* induced by X . For $s \in T$, we refer to a subset $X \subset V$ with $X \cap T = \{s\}$ as an *s-set*. Then $\lambda_{G,T}(s)$ is defined to be the minimum cardinality $|\delta(X)|$ among the s -sets X .

The above max-min relation has an obvious extension to the capacitated case. Given a nonnegative integer function $c : E \rightarrow \mathbb{Z}_+$ of edge *capacities*, let us say that the triple (*network*) (G, T, c) is *inner Eulerian* if for each inner node v , the total capacity of edges incident with v is even when G is a graph, and the total capacity of edges entering v is equal to that of edges leaving v when G is a digraph. Then (1) yields the following relation for an inner Eulerian (G, T, c) :

$$(2) \quad \max\{\text{val}(\mathcal{F})\} = \frac{1}{2} \sum_{s \in T} \lambda_{c,T}(s),$$

where $\lambda_{c,T}(s)$ denotes the minimum cut capacity $c(\delta(X))$ among the s -sets X , the maximum is taken over all collections $\mathcal{F}$ of T -paths $P_1, \dots, P_k$ along with nonnegative *integer* weights $\alpha_1, \dots, \alpha_k \in \mathbb{Z}_+$ that satisfy the packing condition

$$(3) \quad \sum (\alpha_i : e \in P_i) \leq c(e) \quad \text{for all } e \in E,$$

and $\text{val}(\mathcal{F})$ denotes the *total value* of $\mathcal{F}$, defined to be $\alpha_1 + \dots + \alpha_k$ ¹. (Hereinafter for a function $g : S \rightarrow \mathbb{R}$ and a subset $S' \subseteq S$, $g(S')$ stands for $\sum_{e \in S'} g(e)$.)

A collection $\mathcal{F}$ consisting of T -paths P_i with real weights $\alpha_i \in \mathbb{R}_+$ that obeys (3) is called a *free multiflow* (the adjective “free” is used to emphasize that any pair of distinct terminals is allowed to be connected by a path, i.e., the commodity graph in the multiflow maximization problem is complete). A multiflow achieving the equality in (2) is called *maximum*. Thus, whenever (G, T, c) is inner Eulerian, there exists an *integer* maximum free multiflow (i.e., having the weights of all paths integral).

Cherkassky [1] showed that such a multiflow in an inner Eulerian undirected network can be found in strongly polynomial time. Subsequently much faster algorithms both for graphs and digraphs have been developed. They apply a “divide-and-conquer” approach in which a current network (G, T, c) with $|T| \geq 4$ is recursively

¹Originally relation (2) was stated for fractional multiflows $\mathcal{F}$ in [12], with a flaw in the proof.

replaced by two networks (G', T', c') and (G'', T'', c'') such that $|T'|, |T''| \leq \lceil |T|/2 \rceil + 1$. Originally, such an approach was applied in [11] to find, in $O(\phi(V, E) \log T)$ time, a *half-integer* maximum multiflow in a graph G with integer edge capacities (but not guaranteeing integrality in the inner Eulerian case). Hereinafter, in notation involving functions of numerical arguments or time bounds, we indicate sets for their cardinalities, and $\phi(n, m)$ stands for the complexity of an algorithm for finding a maximum flow in a network with n nodes and m edges.

This algorithm was improved and extended in [10] so as to find an integer maximum free multiflow in an inner Eulerian undirected network in the same time $O(\phi(V, E) \log T)$, and in an inner Eulerian directed network in $O(\phi(V, E) \log T + V^2 E)$ time.

Remark 1. The inner Eulerianness condition is important. Withdrawing it makes the undirected problem more difficult, though still polynomially solvable in the non-capacitated case (a max-min relation is due to Mader [17] and an original polynomial algorithm is due to Lovász [16]), and makes the directed noncapacitated problem NP-hard already for two terminals [4].

The purpose of this paper is to extend the above theoretical and algorithmic results to bidirected graphs. (This sort of nonstandard graphs was introduced by Edmonds and Johnson [2] in connection with one important class of integer linear programs generalizing problems on flows and matchings; for a survey, see also [13, 18].)

Recall that in a *bidirected* graph $G = (V, E)$ three types of edges are allowed: (i) a usual directed edge, or an *arc*, that leaves one node and enters another one; (ii) an edge *from both* of its ends; or (iii) an edge *to both* of its ends. When $u = v$, the edge becomes a loop; in what follows we admit only loops of types (ii) and (iii) (as loops of type (i) do not affect our problem and can be excluded from consideration). A nonloop edge entering a node v contributes one unit to the indegree $\deg^{\text{in}}(v)$ of v , while a loop of type (iii) at v contributes two units to $\deg^{\text{in}}(v)$; the outdegree $\deg^{\text{out}}(v)$ of v is specified in a similar way. Edges e, e' connecting nodes u, v are called *parallel* if e enters u if and only if e' does so, and similarly for v . If G has no parallel edges, then $|E| \leq 2|V|^2$. An instance of bidirected graphs is drawn in Fig. 1.

The notion of inner Eulerianness for a bidirected graph G with a set T of terminals is analogous to that for usual digraphs: $\deg^{\text{in}}(v) = \deg^{\text{out}}(v)$ for all inner nodes v . Inner Eulerian triples (G, T, c) , where $c : E \rightarrow \mathbb{Z}_+$, are those that turn into inner Eulerian pairs (G', T) when each edge e is replaced by $c(e)$ parallel edges.

In order to be able to extend the above results to bidirected graphs, we need to admit T -paths with restricted self-intersections. (In undirected or directed graphs, when one node is reachable from another one by a path, then it is reachable by a simple path as well, but this need not hold in a bidirected graph.) A *walk* in a bidirected graph G is an alternating sequence $P = (s = v_0, e_1, v_1, \dots, e_k, v_k = t)$ of nodes and edges such that each edge e_i connects nodes v_{i-1} and v_i , and for $i = 1, \dots, k-1$, the edges e_i, e_{i+1} form a *transit pair* at v_i , which means that one of e_i, e_{i+1} enters and




Figure 1: A bidirected graph instance

the other leaves v_i . Note that e_1 may enter s and e_k may leave t ; nevertheless, we refer to P as a walk from s to t , or an s – t walk. P is a *cycle* if $v_0 = v_k$ and the pair e_1, e_k is transit at v_0 ; a cycle is usually considered up to cyclically shifting. Observe that an s – s walk is not necessarily a cycle. By a *path* in a bidirected graph G we mean an *edge-simple* walk P , i.e., a walk with all edges different. Similar to usual graphs/digraphs, a T -path (a T -walk) is meant to be a path (resp. walk) whose ends are distinct terminals and the other nodes are inner.

Define the number $\lambda_{G,T}(s)$ for $s \in T$ as before. We show the following

Theorem 1.1 *Property (1) remains valid for a bidirected graph G and the set of T -paths in it.*

Remark 2. In this theorem it suffices to consider only minimal T -paths, where a path (edge-simple cycle) $P = (v_0, e_1, v_1, \dots, e_k, v_k)$ is called *minimal* if no part of P from v_i to v_j with $i < j$ (resp. $0 < j - i < k$) forms a cycle. (A minimal path/cycle need not be simple but it passes any node of G at most twice.) Moreover, one can consider only those T -paths whose induced bidirected graphs contain no cycle. (In the underlying undirected graph of such a path, each edge belongs to at most one circuit.)

A usual digraph is a special case of bidirected graphs and Theorem 1.1 generalizes the above-mentioned result in [14]. Also there is a natural correspondence between the T -paths in an undirected graph G and the minimal T -paths in the bidirected graph G' formed from G as follows: direct each edge of G from both of its ends, and for each inner node v , assign $\lceil \deg(v)/2 \rceil$ loops entering (twice) v . Then a T -path P in G is turned into a T -path in G' by adding one loop to each intermediate node of P . Moreover, (G', T) is inner Eulerian if (G, T) is such. Due to this correspondence, Theorem 1.1 generalizes the above-mentioned Cherkassky–Lovász’ result for undirected graphs as well.

Like the pure graph and digraph cases, one can reformulate Theorem 1.1 in capacitated terms: relation (2) concerning integer free multiflows $\mathcal{F}$ remains valid when G

is bidirected and (G, T, c) is inner Eulerian. In this case one should consider T -walks, rather than T -paths, and refine the packing condition (3) as

$$(4) \quad \sum_{i=1}^k \alpha_i n_i(e) \leq c(e) \quad \text{for all } e \in E,$$

where $n_i(e)$ is the number of occurrences of an edge e in a walk P_i . Thus, the above problem for undirected and directed networks is generalized as:

(P) *Given an inner Eulerian network (G, T, c) , where G is bidirected, find a collection (free multifold) $\mathcal{F}$ of T -walks $P_1, \dots, P_k$ with weights $\alpha_1, \dots, \alpha_k \in \mathbb{Z}_+$ that satisfies (4) and maximizes the value $\text{val}(\mathcal{F}) := \alpha_1 + \dots + \alpha_k$.*

Remark 3. Let X be an arbitrary subset of nodes of G . One can modify G as follows: for each node $v \in X$ and each edge e incident with v , reverse the direction of e at v . Also for an arbitrary arc e incident with a terminal s , one can reverse the direction of e at s . Both transformations preserve the inner Eulerianness of (G, T, c) and the set of T -walks. Therefore, problem (P) remains equivalent under such transformations.

Another appealing class of nonstandard graphs was introduced by Tutte [20] who originated a mini-theory, parallel to [2] in a sense, aiming to unify and generalize flow and matching problems. These are so-called *skew-symmetric graphs* (or anti-symmetrical digraphs, in Tutte's terminology), digraphs with involutions on the nodes and on the arcs which reverse the orientation of each arc (a precise definition is given in Section 3). His and other researchers' study of structural and optimization problems on skew-symmetric graphs has resulted in a number of interesting theorems, methods and applications.

There is a close relationship between skew-symmetric and bidirected graphs, and typically results on the former can be reformulated for the latter, and vice versa. So is for the problem of our study, too. We take advantage from both representations. The language of bidirected graphs is more preferable for us to work in the non-capacitated case; we prove Theorem 1.1 directly and obtain its analog for skew-symmetric graphs as a corollary. On the other hand, we prefer to deal with skew-symmetric graphs in algorithmic design for the capacitated case. (A serious reason is that a flow in a bidirected network is defined as a packing of T -paths and we do not see reasonable alternative settings for it, while a flow in a skew-symmetric network can be given in a more compact form, via a function on the arc set.) Some facts about skew-symmetric flows and technical tools elaborated for them help us to devise a fast algorithm for the skew-symmetric analog of problem (P) concerning *integer skew-symmetric free multiflows* in an inner Eulerian skew-symmetric network. This yields a fast algorithm for (P) as well.

The paper is organized as follows. In Section 2 we prove Theorem 1.1 (which is relatively simple) relying on the fact that an inner Eulerian bidirected graph can be decomposed into cycles and paths with both ends in T . Section 3 explains the

correspondence between bidirected and skew-symmetric graphs, reviews some known results about the latter (in particular, Tutte's result on symmetric decompositions of skew-symmetric flows) and gives a skew-symmetric analog of Theorem 1.1. Section 4 develops an algorithm for finding a maximum integer skew-symmetric free multiflow in an inner Eulerian skew-symmetric network. It relies on a general approach in [11] and some ingredients from [10] and attracts additional combinatorial ideas and techniques. As a consequence, problem (P) is solved in time $O(VE \log T \log(2 + V^2/E))$ (if the $O(nm \log(2 + n^2/m))$ -algorithm of Goldberg and Tarjan [9] is applied for finding a maximum flow in a directed network with n nodes and m arcs). This improves the bound in [10] for digraphs. To achieve this bound, we use a faster procedure for the particular flow decomposition problem: given an integer flow f with $O(1)$ sources and sinks in a digraph with n nodes and m arcs, decompose f into the sum of integer flows, each connecting one source to one sink. The procedure developed in Section 5 solves this problem in $O(m \log(2 + n^2/m))$ time. In the concluding Section 6, this procedure is extended to symmetric flows in skew-symmetric graphs (it is not used in the algorithm for (P) but may be of interest for other applications).

2 Proof of Theorem 1.1

Let $G = (V, E)$ be an inner Eulerian bidirected graph with a terminal set T . One may assume that G has no loops incident with terminals. Since (G, T) is inner Eulerian, for each inner node v , one can choose a set $\pi(v)$ of transit pairs at v so that each non-loop edge incident with v occurs in exactly one pair and each loop at v (if any) occurs in two pairs. The collection $\{\pi(v) : v \in V - T\}$ determines a decomposition of (the edge-set of) G into a collection $\mathcal{C}$ of edge-simple cycles and a collection $\mathcal{P}$ of paths with both ends at T . More precisely, each edge $e \in E$ belongs to exactly one member P of $\mathcal{C} \cup \mathcal{P}$ and satisfies the following condition: for each end v of e , if $v \in V - T$ and $\{e, e'\} \in \pi(v)$, then either e, v, e' or e', v, e are three consecutive elements in P , while if $v \in T$, then P begins with v, e or ends with e, v . Note that all nodes of any cycle in $\mathcal{C}$ and all intermediate nodes of any path in $\mathcal{P}$ are inner. So each path in $\mathcal{P}$ is a T -path unless it connects equal terminals. When needed, we may reverse some paths in $\mathcal{P}$.

For $s \in T$, let $\mathcal{P}_s$ ($\mathcal{Q}_s$) denote the set of paths in $\mathcal{P}$ with exactly one end (resp. with both ends) at s . Since $|\mathcal{P}_s| + 2|\mathcal{Q}_s| = \deg(s) \geq \lambda_{G,T}(s)$ (where $\deg(v)$ is the full degree $\deg^{\text{out}}(v) + \deg^{\text{in}}(v)$ of v), the theorem becomes trivial when all sets $\mathcal{Q}_s$ are empty. In a general case, we try to transform the decomposition so as to increase the “useful value” $\eta(\mathcal{P}, \mathcal{C}) := \sum_{s \in T} |\mathcal{P}_s|$, by applying a certain augmenting approach.

Consider $s \in T$ and assume, w.l.o.g., that all paths in $\mathcal{P}_s$ begin at s . Let $L = (x_0, x_1, \dots, x_q)$ be a sequence of distinct nodes such that

- (5) either $L = \{s\}$, or x_0 belongs to a path in $\mathcal{Q}_s$, and for $i = 1, \dots, q$, the nodes x_i, x_{i-1} occur in a cycle in $\mathcal{C}$ or occur in *this order* in a path in $\mathcal{P}_s$.

We say that L is augmenting if x_q belongs to a path in $\mathcal{P}$ having both ends in $T - \{s\}$. Consider two cases.

Case 1. There is no augmenting sequence for s . Let X_s be the set of all nodes occurring in sequences L as in (5). Clearly $X_s \cap T = \{s\}$. Consider an edge e of the cut $\delta(X_s)$; let u, v be the ends of e in X_s and $V - X_s$, respectively. Observe that e belongs to neither a cycle in $\mathcal{C}$ nor a path in $\mathcal{P} - \mathcal{P}_s$. Also (by (5)) if e belongs to a path $P \in \mathcal{P}_s$, then all nodes of P from s to (the last occurrence of) u are contained in X_s , i.e., P traverses the cut $\delta(X_s)$ exactly once. This implies $|\mathcal{P}_s| = |\delta(X_s)|$.

Hence, if none of terminals admits an augmenting sequence as above, then the number of T -paths in $\mathcal{P}$ is at least $\frac{1}{2} \sum_{s \in T} \lambda_{G,T}(s)$, as required.

Case 2. An augmenting sequence $L = (x_0, x_1, \dots, x_q)$ for s exists. Let L be chosen so that no proper subsequence in it is augmenting. Then:

- (6) any cycle in $\mathcal{C}$ meets at most two nodes in L and these nodes are consecutive in L ;
- (7) if a path $P \in \mathcal{P}_s$ contains a node x_i , then the part of P from s to (the last occurrence of) x_i can contain at most one node x_j with $j > i$; moreover, if such an x_j exists then $j = i + 1$.

We transform $(\mathcal{P}, \mathcal{C})$ along L , step by step, as follows. Choose a $Q \in \mathcal{Q}_s$ containing x_0 . At the first step, if (a) x_0, x_1 belong to a cycle $C \in \mathcal{C}$, then we combine Q and C into one s - s path. And if (b) x_0, x_1 belong to a path $P \in \mathcal{P}_s$ from s to t , say, and if x_1 occurs in P earlier than x_0 , then we replace Q by the concatenation of the part P' of P from s to (the last occurrence of) x_0 and the part Q' of Q from x_0 to s , and replace P by the concatenation of the rest of Q (from s to x_0) and the rest of P (from x_0 to t). (We assume, w.l.o.g., that the last edge of P' and the first edge of Q' form a transit pair at x_0 ; otherwise reverse Q .) As a result, we obtain an s - s path, denoted by Q as before, that contains x_1 . In case (a), the cycle C vanishes, and in case (b), the new path P goes from s to t as before, and its part from x_0 to t preserves. This together with (6) and (7) implies validity of (5) for the remaining sequence $(x_1, \dots, x_q)$; moreover, (6) and (7) are maintained as well. At the second step, we consider the pair x_1, x_2 and act in a similar way, and so on.

Eventually, after q steps, the current s - s path Q contains the node x_q . Since L is augmenting, x_q also belongs to some t - p path $R \in \mathcal{P}$ with $t, p \in T - \{s\}$ (possibly $p = t$). Now splitting Q, R at x_q and concatenating the arising four pieces in another way, we obtain two T -paths, one connecting s and p and the other connecting s and t . This gives a new decomposition $(\mathcal{P}, \mathcal{C})$ of G having a larger value of η , and the theorem follows. ■

In fact, the above proof is constructive and prompts a polynomial algorithm for finding a maximum number of pairwise edge-disjoint T -paths in an inner Eulerian bidirected graph. A more efficient and more general algorithm (dealing with the capacitated case) is described in Section 4.

3 Skew-Symmetric Graphs

This section contains terminology and some basic facts concerning skew-symmetric graphs and explains the correspondence between these and bidirected graphs. For a more detailed survey on skew-symmetric graphs, see, e.g., [20, 7, 8].

A *skew-symmetric graph* is a digraph $G = (V, E)$ endowed with two bijections σ_V, σ_E such that: σ_V is an involution on the nodes (i.e., $\sigma_V(v) \neq v$ and $\sigma_V(\sigma_V(v)) = v$ for each $v \in V$), σ_E is an involution on the arcs, and for each arc e from u to v , $\sigma_E(e)$ is an arc from $\sigma_V(v)$ to $\sigma_V(u)$. For brevity, we combine the mappings σ_V, σ_E into one mapping σ on $V \cup E$ and call σ the *symmetry* (rather than skew-symmetry) of G . For a node (arc) x , its symmetric node (arc) $\sigma(x)$ is also called the *mate* of x , and we will often use notation with primes for mates, denoting $\sigma(x)$ by x' . Obviously, $\deg^{\text{in}}(v) = \deg^{\text{out}}(v')$ for each $v \in V$.

We admit parallel arcs, but not loops, in G . Observe that if G contains an arc e from a node v to its mate v' , then e' is also an arc from v to v' (so the number of arcs of G from v to v' is even and these parallel arcs are partitioned into pairs of mates).

By a path (circuit) in G we mean a simple directed path (cycle), unless explicitly stated otherwise. The symmetry σ is extended in a natural way to paths, subgraphs, and other objects in G . In particular, two paths or circuits are symmetric to each other if the elements of one of them are symmetric to those of the other and go in the reverse order: for a path (circuit) $P = (v_0, e_1, v_1, \dots, e_k, v_k)$, the symmetric path (circuit) $\sigma(P)$ is $(v'_k, e'_k, v'_{k-1}, \dots, e'_1, v'_0)$. One easily shows that G cannot contain self-symmetric circuits (cf. [8]).

Following terminology in [7], a path or circuit in G is called *regular* if it contains no pair of symmetric arcs (while symmetric nodes in it are allowed). For a function h on E , its symmetric function h' is defined by $h'(e') := h(e)$, $e \in E$, and h is called (self-)symmetric if $h = h'$.

For a function $f : E \rightarrow \mathbb{R}$ and a node $v \in V$, define

$$\text{div}_f(v) := \sum (f(e) : e \in \delta^{\text{out}}(v)) - \sum (f(e) : e \in \delta^{\text{in}}(v)),$$

(the *divergency* of f at v), where $\delta^{\text{out}}(v)$ ($\delta^{\text{in}}(v)$) denotes the set of arcs of G leaving (resp. entering) v . Let f be nonnegative, integer-valued and symmetric, and let S be a subset of nodes not intersecting $S' = \sigma(S)$. When $\text{div}_f(v)$ is nonnegative at each $v \in S$ and zero at each $v \in V - (S \cup S')$, f is said to be an *IS-flow* (integer symmetric flow) from S to S' . The *value* $\text{val}(f)$ of f is $\sum_{s \in S} \text{div}_f(s)$. By a multiterminal version of a theorem due to Tutte [20], an IS-flow f from S to S' has an *integer symmetric decomposition*. This means that

- (8) f is representable as $f = \alpha_1 \chi^{P_1} + \alpha_1 \chi^{P'_1} + \dots + \alpha_k \chi^{P_k} + \alpha_k \chi^{P'_k}$, where for $i = 1, \dots, k$, P_i is a path from S to S' or a circuit, P'_i is the path (also going from S to S') or circuit symmetric to P_i , and $\alpha_i \in \mathbb{Z}_+$.

Here χ^P denotes the incidence vector of the arc-set of a path/circuit P , i.e., for $e \in E$, $\chi^P(e) = 1$ if e belongs to P , and 0 otherwise. Note that paths/circuits in (8) need not be regular. Considering α_i as the weight of P_i and of P'_i , observe that the total weight of paths from S to S' is equal to $\text{val}(f)$. Similar to flow decomposition in usual digraphs, an integer symmetric decomposition of an IS-flow f can be found in $O(VE)$ time.

Let (G, T) be inner Eulerian, where the terminal set T is (self-)symmetric. Take a partition $\{S, S' = \sigma(S)\}$ of T such that $\deg^{\text{out}}(s) \geq \deg^{\text{in}}(s)$ for all $s \in S$. Since the all-unit function f on E represents an IS-flow from S to S' , (8) implies that

- (9) there exists a symmetric collection $\mathcal{P}$ of circuits and paths from S to S' in G such that the members of $\mathcal{P}$ are pairwise arc-disjoint and cover E , and each terminal $s \in S$ is the beginning of exactly $\deg^{\text{out}}(s) - \deg^{\text{in}}(s)$ paths in $\mathcal{P}$.

Moreover, the members of $\mathcal{P}$ are regular (for if some $P \in \mathcal{P}$ contains mates $e, e' \in E$, then e, e' are in $\sigma(P)$ as well, which is impossible).

Next we explain the correspondence between skew-symmetric and bidirected graphs (cf. [8, Sec. 2]). For sets X, A, B , we may use notation $X = A \sqcup B$ when $X = A \cup B$ and $A \cap B = \emptyset$. Given a skew-symmetric graph $G = (V, E)$, choose an arbitrary partition $\pi = \{V_1, V_2\}$ of V such that V_2 is symmetric to V_1 . Then G, π determine bidirected graph H with node set V_1 whose edges correspond to the pairs of symmetric arcs in G . More precisely, arc mates a, a' of G generate one edge e of H connecting nodes $u, v \in V_1$ such that: (i) e goes from u to v if one of a, a' goes from u to v (and the other goes from v' to u' in V_2); (ii) e leaves both u, v if one of a, a' goes from u to v' (and the other from v to u'); (iii) e enters both u, v if one of a, a' goes from u' to v (and the other from v' to u). In particular, e is a loop if a, a' connect a pair of symmetric nodes.

Conversely, a bidirected graph H with node set V_1 , say, determines skew-symmetric graph $G = (V, E)$ with symmetry σ as follows. Take a copy $\sigma(v)$ of each element v of V_1 , forming the sets $V_2 := \{\sigma(v) : v \in V_1\}$ and $V := V_1 \sqcup V_2$. For each edge e of H connecting nodes u and v , assign two “symmetric” arcs a, a' in G so as to satisfy (i)-(iii) above (where $u' = \sigma(u)$ and $v' = \sigma(v)$). An example is depicted in Fig. 2.

Remark 4. A bidirected graph generates one skew-symmetric graph, while a skew-symmetric graph generates a number of bidirected ones, depending on the partition π of V that we choose in the first construction. The latter bidirected graphs are produced from each other by the edge reversing transformation with respect to a subset of nodes as indicated in Remark 3 in the Introduction, so they are equivalent for us.

A terminal set S in H generates the symmetric terminal set $T := S \sqcup \sigma(S)$ in G , and vice versa. One easily checks that (H, S) is inner Eulerian if and only if (G, T) is such. Also there is a correspondence between the S -paths in H and certain T -paths

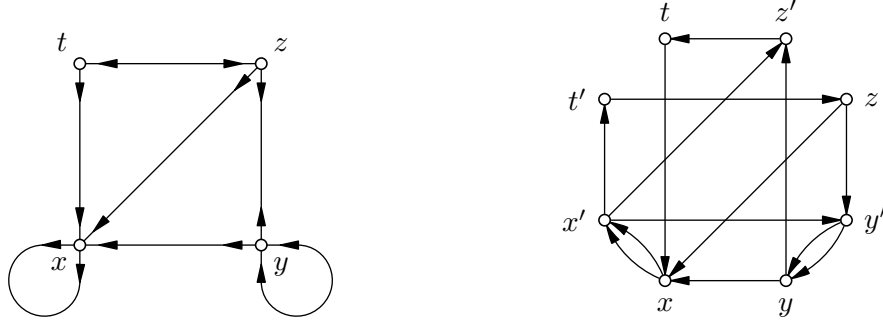


Figure 2: Related bidirected and skew-symmetric graphs

in G . More precisely, let τ be the natural mapping of $V \cup E$ to $V_1 \cup E(H)$ (where $E(H)$ is the edge set of H). Each walk (cycle) $P = (v_0, a_1, v_1, \dots, a_k, v_k)$ in G induces the sequence $\tau(P) := (\tau(v_0), \tau(a_1), \tau(v_1), \dots, \tau(a_k), \tau(v_k))$ of nodes and edges in H .

Conversely, for a walk (cycle) $Q = (w_0, e_1, w_1, \dots, e_k, w_k)$ in H , form the sequence $\tilde{\tau}(Q) := (v_0, a_1, v_1, \dots, a_k, v_k)$ of nodes and arcs in G by the following rule:

- (R) $v_0 := w_0$ if e_1 leaves w_0 , and $v_0 := \sigma(w_0)$ if e_1 enters w_0 ; and for $i = 1, \dots, k$:
- (a) if e_i leaves w_{i-1} , then a_i is the arc in $\tau^{-1}(e_i)$ that leaves w_{i-1} , and v_i is the head of a_i ; (b) if e_i enters w_{i-1} , then a_i is the arc in $\tau^{-1}(e_i)$ that leaves $\sigma(w_{i-1})$, and v_i is the head of a_i .

(When e_i is a loop, the arcs in $\tau^{-1}(e_i)$ are parallel, and the arc a_i in this set is chosen arbitrarily.) It is not difficult to conclude that (R) provides:

(10) for a walk (cycle) Q in H ,

- (i) $\tilde{\tau}(Q)$ is a walk (cycle) in G and $\tau(\tilde{\tau}(Q)) = Q$;
- (ii) if Q is edge-simple and minimal (see Remark 2 in the Introduction), then $\tilde{\tau}(Q)$ is a regular path (circuit).

Also the walk (cycle) reverse to Q determines the walk (cycle) in G symmetric to $\tilde{\tau}(Q)$ (up to the choice of arcs a_i for loops e_i). The corresponding converse properties to those in (10) also take place.

Let us say that a T -walk P from s to t in G is *essential* if t is different from $\sigma(s)$. Thus, we have a natural bijection between the essential regular T -paths in G (considered up to parallel arc mates) and the minimal S -paths in H . This gives

$$(11) \quad \tilde{\nu}_{G,T} = 2\nu_{H,S},$$

where $\tilde{\nu}_{G,T}$ is the maximum cardinality of a symmetric collection of pairwise arc-disjoint essential T -paths in G .

Note also that for a terminal $s \in S$ and an s -set X in H , each edge of the cut $\delta_H(X)$ generates two arc mates in the symmetric cut $\delta_G(X \sqcup \sigma(X))$ in G . Therefore,

$$(12) \quad \tilde{\lambda}_{G,T}(s) = 2\lambda_{H,S}(s) \quad \text{for each } s \in S,$$

where $\tilde{\lambda}_{G,T}(s)$ is the minimum cardinality of a symmetric cut in G separating $\{s, s'\}$ and $T - \{s, s'\}$.

In view of relations (11) and (12), Theorem 1.1 is equivalent to the following

Corollary 3.1 *For a skew-symmetric graph $G = (V, E)$ with a symmetric set T of terminals, if (G, T) is inner Eulerian, then $\tilde{\nu}_{G,T} = \frac{1}{2} \sum_{s \in S} \tilde{\lambda}_{G,T}(s)$.*

In the capacitated case, we are given a symmetric function $c : E \rightarrow \mathbb{Z}_+$ of arc capacities in a skew-symmetric graph $G = (V, E)$ with a symmetric set $T = S \sqcup S'$ of terminals. By an integer symmetric free multiflow (or, briefly, an *IS-multiflow*) in the network (G, T, c) we mean a collection F of integer flows f_{st} for the ordered pairs (s, t) of distinct terminals in S such that: (a) $f = f_{st}$ is a flow from $\{s, s'\}$ to $\{t, t'\}$ (i.e., $\text{div}_f(v)$ is nonnegative for $v = s, s'$, nonpositive for $v = t, t'$, and 0 otherwise); (b) each f_{st} is symmetric to f_{ts} ; and (c) F is *c-admissible*, i.e.,

$$\sum_{st} f_{st}(e) \leq c(e) \quad \text{for each } e \in E.$$

The (total) *value* $\text{val}(F)$ of F is $\sum_{st} \text{val}(f_{st})$. The problem is:

(PS) *Given an inner Eulerian network (G, T, c) , where G is a skew-symmetric graph and T and c are symmetric, find a maximum IS-multiflow, i.e., an IS-multiflow F maximizing $\text{val}(F)$.*

To see how this problem is related to (P), let (G, T) correspond to (H, S) , where H is bidirected. Let $\hat{c}$ be the corresponding capacity function in H , i.e., $\hat{c}(e) = c(a)$ for an edge $e \in E(H)$ and its images a, a' in G . The inner Eulerianness of (G, T, c) implies that of $(H, S, \hat{c})$, and vice versa. Given an IS-multiflow F in (G, T, c) , represent each flow f_{st} in the path packing form:

$$(13) \quad f_{st} = \alpha_1 \chi^{P_1} + \dots + \alpha_k \chi^{P_k}, \text{ where } \alpha_i = \alpha(P_i) \in \mathbb{Z}_+ \text{ and } P_i \text{ is a circuit or a (simple) path from } \{s, s'\} \text{ to } \{t, t'\}.$$

We assume that the representation of each flow f_{st} is symmetric to that of f_{ts} . Then the set $\mathcal{P}$ of (essential) T -paths in these representations is symmetric, with $\alpha(P) = \alpha(P')$ for each $P \in \mathcal{P}$, and we have $\text{val}(F) = \sum (\alpha(P) : P \in \mathcal{P})$. Now each pair $P, P' \in \mathcal{P}$ of path mates determines an S -walk $\hat{P}$ in H (considered up to reversing), and taking together these paths $\hat{P}$ with weights $\alpha(P)$, we obtain a multiflow $\mathcal{F}$ in $(H, S, \hat{c})$ satisfying $\text{val}(\mathcal{F}) = \frac{1}{2} \text{val}(F)$.

Conversely, let $\mathcal{F} = (\hat{\mathcal{P}}, \hat{\alpha})$ be an integer multiflow in $(H, S, \hat{c})$, where $\hat{\mathcal{P}}$ consists of S -walks. One may assume that for each edge e of H , no path $\hat{P} \in \hat{\mathcal{P}}$ traverses e twice

in the same direction (for otherwise one can remove a cycle from $\widehat{P}$). Then each s – t walk $\widehat{P}$ determines an arc-simple directed walk P from $\{s, s'\}$ to $\{t, t'\}$ and its mate P' from $\{t, t'\}$ to $\{s, s'\}$ in G . Assign $\alpha(P) := \alpha(P') := \widehat{\alpha}(\widehat{P})$. Let f_{st} be the sum of functions $\alpha\chi^P$ over the obtained walks P from $\{s, s'\}$ to $\{t, t'\}$. Then f_{ts} is symmetric to f_{st} . These flows form an IS-multiflow F in (G, T, c) satisfying $\text{val}(F) = 2\text{val}(\mathcal{F})$.

Thus, problems (PS) and (P) (regarding $H, S, \widehat{c}$) are reduced to each other. In the next section we devise an efficient algorithm for finding an optimal solution to (PS) and then explain that it can be transformed into an optimal solution to the corresponding instance of (P) without increasing the time bound.

4 Algorithm

In this section we describe an algorithm to solve problem (PS) and estimate its complexity. We use terminology and facts from the previous section.

Let $(G = (V, E), T, c)$ be an inner Eulerian skew-symmetric network. As before, we represent the terminal set T as $S \sqcup S'$ and associate with (G, T, c) the corresponding bidirected network $(H, S, \widehat{c})$. One may assume that no arc in G connects a pair of terminal mates. Also if G has an arc entering a terminal $s \in S$, then replacing its head s by s' and symmetrically replacing the tail s' of the symmetric arc e' by s does not affect the problem in essence. So we may assume that $\deg^{\text{in}}(s) = 0$ for each terminal $s \in S$ in G . Then any flow from $\{s, s'\}$ to $\{t, t'\}$, where $s, t \in S$, is essentially a flow from s to t' , and its symmetric flow is a flow from t to s' ; this property will simplify technical details in our construction. In terms of H , the latter assumption says that each edge incident with a terminal s in H leaves s (cf. Remark 3 in Section 1).

The algorithm uses a recursion analogous to that in [11], and the case $|S| = 3$ is the base in it. We first consider this special case (which generalizes the case $|S| = 2$).

4.1 Case $|S| = 3$.

The algorithm for this case uses one auxiliary skew-symmetric graph $G_1 = (V, E_1)$. It is obtained from G by adding, for each pair v, v' of inner node mates, four *auxiliary arcs* connecting v and v' : two arc mates a_v, a'_v going from v to v' and two arc mates $a_{v'}, a'_{v'}$ from v' to v , regardless of the existence of such arcs in G . This G_1 corresponds to the bidirected graph H_1 obtained from H by adding two auxiliary loops at each inner node v , one leaving v (twice) and the other entering v .

The algorithm consists of three stages. Let $S = \{s_1, s_2, s_3\}$.

At *Stage 1*, we apply the algorithm for inner Eulerian graphs from [10] to find a maximum integer free multiflow in the underlying undirected graph $\overline{H}$ for H having the same set S of terminals and the same capacities $\widehat{c}$. It runs in $O(\phi(V, E))$ time (since $|S| = O(1)$) and outputs (simple) S -paths $\overline{P}_1, \dots, \overline{P}_k$ in $\overline{H}$ and weights $\alpha_1, \dots, \alpha_k \in \mathbb{Z}_+$ satisfying the packing condition w.r.t. $\widehat{c}$. (Recall that ϕ is a bound

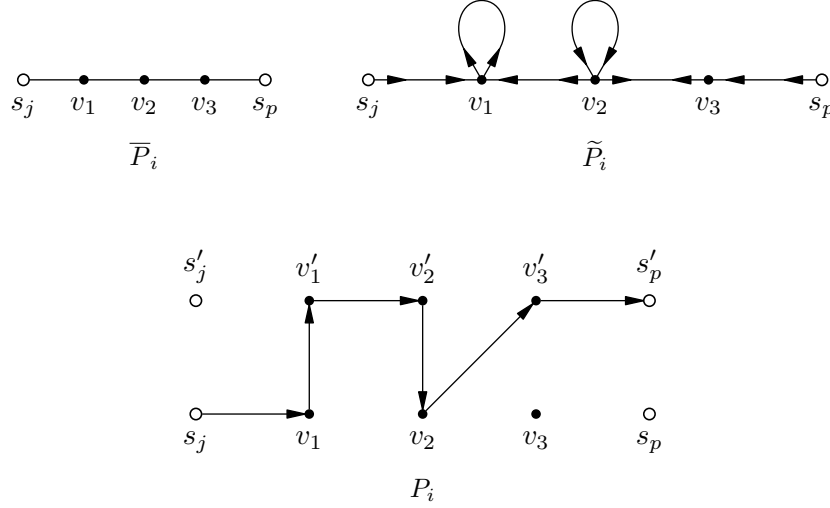


Figure 3: A path $\overline{P}_i$ and its images in the graphs H_1 and G_1

for the applied max flow algorithm; we assume $\phi = \Omega(VE)$). It also outputs pairwise disjoint s_i -sets $\overline{X}_i$, $i = 1, 2, 3$, such that for each i , the sum of weights α_j of paths $\overline{P}_j$ connecting s_i and $S - \{s_i\}$ is equal to $\widehat{c}(\delta_H(\overline{X}_i))$. However, some pairs of consecutive edges in $\overline{P}_j$ may be non-transit in H , i.e., $\overline{P}_j$ is not necessarily a path in H .

At *Stage 2*, we transform $\overline{P}_1, \dots, \overline{P}_k$ into paths in the auxiliary bidirected graph H_1 . More precisely, for each $\overline{P}_i = (v_0, e_1, v_1, \dots, e_q, v_q)$ and for each non-transit pair e_j, e_{j+1} in it, if both edges e_j, e_{j+1} enter (leave) v_j , then the element v_j of $\overline{P}_i$ is replaced by the string v_j, ℓ, v_j , where ℓ is the auxiliary loop leaving (resp. entering) v_j . This results in minimal S -paths $\tilde{P}_1, \dots, \tilde{P}_k$ in H_1 .

Each path $\tilde{P}_i$ and its reverse one are then lifted to G_1 (by the method explained in Section 3), giving regular T -paths P_i, P'_i symmetric to each other. (Figure 3 illustrates paths $\overline{P}_i, \tilde{P}_i, P_i$.) For each pair s_j, s_p ($j \neq p$), the functions $\alpha_i \chi^{P_i}$ or $\alpha_i \chi^{P'_i}$ for the paths from s_j to s'_p are added up, forming s_j - s'_p flow g_{jp} . This gives a symmetric collection of six integer flows in G_1 ; see Figure 4. The $\widehat{c}$ -admissibility of the above multiflow in $\overline{H}$ and the fact that each path P_i is regular imply that the total flow though each arc e of G does not exceed $c(e)$. Also the fact that the cuts $\delta_H(\overline{X}_i)$ are saturated implies that

$$(14) \quad \text{for } i = 1, 2, 3, \text{ the arcs in } \delta^{\text{out}}(X_i) \text{ are saturated by } g_{i,i-1} + g_{i,i+1}, \text{ and symmetrically, the arcs in } \delta^{\text{in}}(X_i) \text{ are saturated by } g_{i-1,i} + g_{i+1,i},$$

where $X_i := \overline{X}_i \sqcup \overline{X}'_i$ and the indices are taken modulo 3. So the IS-multiflow consisting of these six flows has maximum value.

At *Stage 3*, we improve the above flows g_{ij} in G_1 by reducing their values on the auxiliary arcs to zero, eventually obtaining the desired multiflow in G . In view

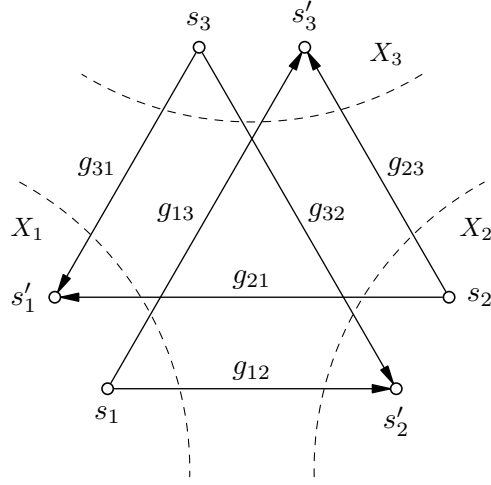


Figure 4: Flows g_{ij} in G_1

of (14), for $i = 1, 2, 3$, one may assume that $g_{i-1,i+1}$ and $g_{i+1,i-1}$ take zero values on all arcs of the subgraph $\langle X_i \rangle$ of G_1 induced by X_i .

Take the residual capacities $\Delta(e) := c(e) - \sum_{ij} g_{ij}(e)$ of arcs $e \in E$. The divergency of c (w.r.t. E) and of each g_{ij} (w.r.t. E_1) at any inner node is zero, therefore,

$$(15) \quad \text{div}_\Delta(v) = \sum_{ij} g_{ij}(v, v') \quad \text{for each } v \in V - T,$$

where $g(v, v')$ denotes $g(a_v) + g(a'_{v'}) - g(a_{v'}) - g(a'_v)$ (recall that a_v, a'_v are the auxiliary arcs from v to v'). The function Δ on E is nonnegative, integer-valued and symmetric. Also (15) and

$$(16) \quad g_{ij}(v, v') = -g_{ij}(v', v) = g_{ji}(v, v') \quad \text{for each } v \in V - T$$

imply that $\text{div}_\Delta(v)$ is even for each $v \in V - T$. Hence we can extend Δ to the auxiliary arcs so as to obtain an IS-flow in (G_1, T) . (The extended Δ satisfies $\Delta(v, v') + \sum_{ij} g_{ij}(v, v') = 0$ for each $v \in V - T$.)

Notice that $\Delta(e) = 0$ for each arc e in the cut $\delta(X_i)$, $i = 1, 2, 3$, by (14). Therefore, the restriction Δ_i of Δ to the set A_i of arcs of the subgraph $\langle X_i \rangle$ is an IS-flow from s_i to s'_i . In its turn, the restriction Δ_0 of Δ to the set A_0 of arcs with both ends in $W := V - (X_1 \cup X_2 \cup X_3)$ is an integer symmetric circulation in the subgraph (W, A_0) . (Recall that the sets X_1, X_2, X_3 are pairwise disjoint.)

We start with getting rid of nonzero arc values of the above flows on the auxiliary arcs within the subgraph $\langle X_1 \rangle$. To this aim, apply the integer symmetric decomposition procedure to Δ_1 (cf. (8)) to represent it as the sum of integer s_1 - s'_1 -flows h, h' , where h' is symmetric to h . Combine $g := g_{12} + g_{13} + h$ and $g' := g_{21} + g_{31} + h'$ (where h, h' are formally extended by zeros on $E_1 - A_1$). Then g is an integer flow from s_1

to S' , and g' is the flow from S to s'_1 symmetric to g . Also

$$g(v, v') = g_{12}(v, v') + g_{13}(v, v') + h(v, v') = 0 \quad \text{for each } v \in X_1 - \{s_1, s'_1\},$$

in view of $h(v, v') = \frac{1}{2}\Delta_1(v, v')$, $\Delta(v, v') + \sum_{ij} g_{ij}(v, v') = 0$ and $g_{23}(e) = g_{32}(e) = 0$ for all $e \in A_1$. So we can reduce g, g' to zero on all auxiliary arcs in $\langle X_1 \rangle$. Now using standard flow decomposition, we represent the new flow g as the sum of three integer flows f_1, f_2, f_3 , from s_1 to s'_1 , from s_1 to s'_2 , and from s_1 to s'_3 , respectively. Note that $g(e) = 0$ for each $e \in \delta^{\text{in}}(X_1)$ implies that f_1 is zero on all arcs of the cut $\delta(X_1)$. Update $g_{12} := f_2$ and $g_{13} := f_3$; the flows g_{21} and g_{31} are updated symmetrically. Then the resulting four flows together with the remaining flows g_{23}, g_{32} satisfy (14) as before (thus forming a maximum IS-multiflow) and take zero values on the auxiliary arcs in $\langle X_1 \rangle$, as required. Do similarly for X_2 and X_3 .

The task of improving the flows within the subgraph $\langle W \rangle = (W, A_0)$ is a bit more involved. First of all we modify g_{12} (and g_{21}) so as to get

$$(17) \quad g_{12}(v, v') + g_{23}(v, v') + g_{31}(v, v') = 0 \quad \text{for each } v \in W$$

(this situation is technically simpler). This is done by decomposing the above-mentioned symmetric circulation Δ_0 in $\langle W \rangle$ into the sum of an integer circulation ω and its symmetric circulation ω' and then by updating $g_{12} := g_{12} + \omega$ and $g_{21} := g_{21} + \omega'$ (with ω, ω' extended by zeros to $E_1 - A_0$). Then the equality $\Delta(v, v') + \sum_{ij} g_{ij}(v, v') = 0$ provides (17).

The process of improving the flows within $\langle W \rangle$ consists of $O(W)$ iterations (the idea is borrowed from the algorithm for digraphs in [10]). At a current iteration, we choose a node $v \in W$ where some $g_{ij}(v, v')$ is nonzero. W.l.o.g, one may assume that $g_{12}(v, v') > 0$ and $g_{13}(v, v'), g_{23}(v, v') \leq 0$. Let $r_0 := |g_{13}(v, v')|$ and $r_1 := |g_{23}(v, v')|$; then $g_{12}(v, v') = r_0 + r_1$, by (17). Let B be the set of (four) auxiliary arcs connecting v and v' .

First of all we represent g_{12} as the sum of two integer s_1 - s'_2 flows g_0, g_1 such that $g_0(v, v') = r_0$ and $g_1(v, v') = r_1$. To do so, replace B by new terminals t, t_0, t_1 and arcs $a = (t, v')$, $a_0 = (v, t_0)$ and $a_1 = (v, t_1)$, and add an arc b from s'_2 to s_1 . Define $h(a_i) := r_i$, $i = 0, 1$, $h(a) := r_0 + r_1$, $h(b) := \text{val}(g_{12})$ and $h(e) := g_{12}(e)$ for the remaining arcs e . This turns h into a flow from t to $\{t_0, t_1\}$, and we decompose it into the sum of integer flows h_0, h_1 , from t to t_0 and from t to t_1 , respectively. These h_0, h_1 determine the desired g_0, g_1 in a natural way.

Combine $f := g_0 + g_{13}$. Then $f(v, v') = g_0(v, v') + g_{13}(v, v') = 0$. Update $f(e) := 0$ for each $e \in B$ and decompose the updated s_1 - $\{s'_2, s'_3\}$ flow f into the sum of integer flows f_0, f_{13} , from s_1 to s'_2 and from s_1 to s'_3 , respectively. Then $\text{val}(f_0) = \text{val}(g_0)$ and $\text{val}(f_{13}) = \text{val}(g_{13})$.

Doing similarly for the flow g_{23} and the flow g'_1 symmetric to g_1 (which have the source s_2 in common), we obtain corresponding s_2 - s'_3 flow f_{23} and s_2 - s'_1 flow f'_1 . Finally, update $g_{12} := f_0 + f_1$ (where f_1 is symmetric to f'_1), $g_{13} := f_{13}$ and $g_{23} := f_{23}$.

The updated flows g_{ij} together with their symmetric ones satisfy $g_{ij}(e) = 0$ for each arc $e \in B$.

Then we choose a next pair of node mates in W , and so on. Upon termination of the process, the resulting flows g_{ij} take zero values on all auxiliary arcs, and it is easily seen from the construction that $\text{val}(g_{ij})$ preserves for all pairs ij . So their restrictions to E form a maximum IS-multiflow in (G, T, c) , as required.

The above algorithm runs in $O(\phi(V, E))$ time plus the time needed to perform $O(W)$, or $O(V)$, flow decompositions during the iterative process at Stage 3 (the other operations including those in $O(1)$ symmetric decompositions take $O(VE)$ time). Each of these decompositions is applied to a flow with $O(1)$ sources and sinks, and we use the procedure in Section 5 to implement it in $O(E \log(2 + V^2/E))$ time. This gives the bound $O(VE \log(2 + V^2/E))$ for the six (or four) terminal case.

4.2 General case.

We now describe the algorithm for an arbitrary $|S| \geq 4$. It is based on a recursive network partition approach.

For a *current* inner Eulerian skew-symmetric network $N = (G, T, c)$, with $T = S \sqcup S'$, the *network partition procedure* partitions S into two sets S_1, S_2 such that $|S_1| = \lceil |S|/2 \rceil$ and $|S_2| = \lfloor |S|/2 \rfloor$ and finds a symmetric subset $X \subset V$ with $X \cap T = S_1 \sqcup S'_1$ whose induced cut $\delta(X)$ has minimum capacity $c(\delta(X))$. This is done by finding a minimum capacity cut $\delta(Y)$ with $Y \cap T = S_1 \sqcup S'_1$ in the underlying undirected network for (G, c) , and by making the symmetrization $X := Y \cup Y'$ (relying on $c(\delta(Y \cup Y')) + c(\delta(Y \cap Y')) \leq c(\delta(Y)) + c(\delta(Y')) = 2c(\delta(Y))$).

Next we shrink the subgraph $\langle V - X \rangle$ of G into two new (*extra*) terminals t_1, t'_1 , making each arc in $\delta^{\text{out}}(X)$ enter t'_1 , and each arc in $\delta^{\text{in}}(X)$ leave t_1 . Similarly, $\langle X \rangle$ is shrunk into extra terminals t_2, t'_2 , each arc in $\delta^{\text{in}}(X)$ becomes entering t'_2 and each arc in $\delta^{\text{out}}(X)$ becomes leaving t_2 . This produces two smaller inner Eulerian networks $N_i = (G_i = (V_i, E_i), T_i, c_i)$ with $T_i = S_i \cup S'_i \cup \{t_i, t'_i\}$, $i = 1, 2$, satisfying

$$(18) \quad |T_i| \leq 4|T|/5, \quad |V_i| \leq |V|, \quad |E_i| \leq |E|, \quad \text{and} \quad |V_1| + |V_2| = |V| + 4$$

(since $|T_1| = 8$ when $|T| = 10$). Also for $X_i := \{t_i, t'_i\}$, the cut $\delta(X_i)$ of G_i has minimum capacity among the cuts separating $\{t_i, t'_i\}$ and $T_i - \{t_i, t'_i\}$.

One application of the network partition procedure, to a current N , takes one minimum cut computation, so it runs in $O(\phi(V, E))$ time.

Let F_i be a (recursively found) maximum free IS-multiflow in N_i . The *aggregation procedure* transforms F_1, F_2 into a maximum free IS-multiflow F in N . The flows in F_i going from S_i to t'_i are combined into one (multisource) flow f_i from S_i to t'_i , and symmetrically, the flows from t_i to S'_i are combined into one flow f'_i . By the maximality of F_i and the minimality of $c_i(\delta(X_i))$, f_i saturates $\delta^{\text{in}}(X_i)$ and f'_i saturates $\delta^{\text{out}}(X_i)$. We glue together (the images of) f_1 and f'_2 , obtaining $S_1 - S'_2$ flow

f in N , and do symmetrically for f_2, f'_1 , obtaining f' . These f, f' are decomposed symmetrically into a symmetric collection of integer one-source-one-sink flows. Then the flows formed from f, f' together with the remaining flows in F_1, F_2 connecting pairs of terminals in T_1 or in T_2 give the desired F . (The maximality of F follows from the fact that for each $s \in S_1$, the total value of flows in F_1 leaving s or entering s' is equal to the minimum capacity of a cut in N_1 separating $\{s, s'\}$ and $T_i - \{s, s'\}$, and similarly for S_2 . The above construction maintains such an equality for F and each $s \in S$.)

At the bottom level ($|S| = 3$), we apply the algorithm described in 4.1.

One application of the aggregation procedure, to current N_1, N_2 , takes $O(S_1 E_1 + S_2 E_2)$ time to create the flows f_1, f_2 as above plus $O(VE)$ time to decompose f , or $O(VE)$ time in total (in view of (18)).

It remains to explain that the resulting multifold F in the initial network N can be efficiently transformed into a maximum integer free multifold in the corresponding bidirected network $(H, S, \hat{c})$. We show that $O(VE \log T)$ time is sufficient to create from F a corresponding symmetric collection $(\mathcal{P}, \alpha)$ of weighted T -paths in N ; these paths determine weighted T -walks in H forming an optimal solution to problem (P) with $(H, S, \hat{c})$, by the relationship explained in Section 3. We assume that each flow f in F is explicitly given only within its support $\text{supp}(f) := \{e \in E : f(e) \neq 0\}$.

Let $\mathcal{T}$ be the binary rooted tree formed by all networks arising during the recursion, with the natural ordering on them. The height of $\mathcal{T}$ (or the depth of the recursion) is $O(\log T)$, in view of the first inequality in (18). For a network $\tilde{N}$ in $\mathcal{T}$, let $A(\tilde{N})$ be the set of terminals from the initial T that are contained in $\tilde{N}$, and $F(\tilde{N})$ the set of flows in F with both terminals in $A(\tilde{N})$. We use the fact that for incomparable N', N'' in $\mathcal{T}$, the supports of flows in $F(N')$ are disjoint from those in $F(N'')$. (Indeed, for the closest common predecessor $\tilde{N}$ of N', N'' , the minimum cut found by the network partition procedure for $\tilde{N}$ separates $A(N')$ and $A(N'')$ and is saturated by the flows not in $F(N') \cup F(N'')$.)

We proceed as follows. For each non-leaf network $\tilde{N}$ with children N_1, N_2 , combine the flows in F with the source in $A(N_1)$ and the sink in $A(N_2)$ into one multiterminal flow $\tilde{f}$ (in the initial network), and then decompose $\tilde{f}$ into a set $\mathcal{P}(\tilde{N})$ of weighted paths from $A(N_1)$ to $A(N_2)$ (the circuits appeared in the decomposition are removed). This takes $O(V \text{supp}(\tilde{f}))$ time. Taken together, the sets $\mathcal{P}(\tilde{N})$, their symmetric sets and corresponding paths appeared by decomposing the flows in F having both terminals in one leaf network, constitute the desired symmetric collection $(\mathcal{P}, \alpha)$. To estimate the complexity, consider the networks $\tilde{N}$ at height i in $\mathcal{T}$. They are incomparable, so the supports of flows $\tilde{f}$ as above in them are pairwise disjoint. Hence to form the sets $\mathcal{P}(\tilde{N})$ for these $\tilde{N}$ takes $O(VE)$ time in total. This gives the bound $O(VE \log T)$ for the whole procedure, as declared.

4.3 Complexity of the algorithm

We show that the above algorithm runs in $O(VE \ell(V, E) \log T)$ time, where $\ell(V, E) := \max\{1, \ln(V^2/E)\}$, assuming $\phi(n, m) = O(nm \log(2 + n^2/m))$ (as in Goldberg–Tarjan’s max flow algorithm). We use induction on the height $h(T)$ of the binary tree $\mathcal{T}$ (it depends only on $|T|$). When $h(T) = 0$ (i.e. $|T| = 6$), the required time bound was shown in 4.1.

Let $h(T) \geq 1$ and let N_1, N_2 be the children of N in $\mathcal{T}$. For $i = 1, 2$, we have $h(T_i) \leq h(T) - 1$, and by induction the time τ_i of the algorithm to solve the problem for N_i is bounded from above as

$$\tau_i \leq C n_i m_i \ell(n_i, m_i) \log T_i$$

for some appropriately chosen constant $C > 0$ (specified later). Here $n_i := |V_i|$ and $m_i := E_i$, keeping notation from 4.2. The network partition and aggregation procedures applied to N take time $O(\phi(n, m))$ and $O(nm)$, respectively, or $Dnm\ell(n, m)$ time together, where D is some constant > 0 , $n := |V|$ and $m := |E|$. Therefore, the time τ to solve the problem for N is estimated as

$$(19) \quad \tau \leq C(n_1 m_1 \ell(n_1, m_1) \log T_1 + n_2 m_2 \ell(n_2, m_2) \log T_2) + Dnm\ell(n, m).$$

We have $\ell(n_i, m_i) \leq \ell(n, m_i)$ (since $n_i \leq n$) and $m_i \ell(n, m_i) \leq m \ell(n, m)$ (this follows from $m_i \leq m$ and from $\ln a > \frac{1}{b} \ln(ab)$ for $b > 1$ and $\ln a > 1$). Also $n_1 + n_2 = n + 4$ and $\log T_i \leq \log T - \log \frac{5}{4}$, by (18). Then (19) implies

$$(20) \quad \tau \leq C \left(nm \log T - nm \log \frac{5}{4} + 4m \log T - 4m \log \frac{5}{4} \right) \ell(n, m) + Dnm\ell(n, m).$$

Since $n \geq |T|$ and $\frac{1}{2}nm \log \frac{5}{4}$ grows faster than $4m \log n$, one can choose constants n_0 and C (depending on D) such that the right hand side value in (20) becomes smaller than $Cnm\ell(n, m) \log T$ for any $n > n_0$. (For the networks with $|V| \leq n_0$, the problem is solved in $O(E)$ time.) This yields the desired time bound.

Theorem 4.1 *A maximum IS-multiflow (resp. a maximum integer free multiflow) in an inner Eulerian skew-symmetric (resp. bidirected) network $(G = (V, E), T, c)$ can be found in $O(VE \log T \log(2 + V^2/E))$ time.*

5 Fast Flow Decomposition

For a fixed $k \in \mathbb{Z}_+$, we consider the problem:

- (D) *Given a flow (integer flow) f from S to T , with $|S| + |T| = k$, in a digraph $G = (V, E)$, find a decomposition $f = \sum (f_{st} : s \in S, t \in T)$, where each f_{st} is a flow (resp. integer flow) from s to t ,*

and show the following (allowing parallel arcs in G and assuming $|V| = O(E)$).

Theorem 5.1 *(D) can be solved in $O(E \log(2 + V^2/E))$ time.*

Note that when G is acyclic, a decomposition (into one-source-one-sink flows or into weighted paths) of any flow in G is carried out in $O(E)$ time by using a topological sorting of the nodes. Sleator and Tarjan [19] showed that any flow f in an arbitrary digraph can be decomposed, in $O(E \log V)$ time, into a circulation and a flow whose support induces an acyclic subgraph of G (so a decomposition of f into one-source-one-sink flows can be found with the same complexity $O(E \log V)$). The algorithm in [19] uses sophisticated computational tools, so-called dynamic trees.

Our approach to solve (D) is based on a node splitting technique and uses only simple data structures. Let Π be the set of pairs st with $s \in S$ and $t \in T$.

In the beginning of the algorithm, we delete from G the arcs e with $f(e) = 0$. Also we sort the nodes v by increasing their degrees $\deg(v)$. (This takes $O(E)$ time.) The algorithm applies $|V|$ iterations.

At each iteration, we choose a node v with $\deg(v)$ minimum in the current graph $G = (V, E)$. First of all we scan the arcs incident with v to select parallel arcs among them. Each tuple of parallel arcs is merged into one arc (and the flows on these are added up). The node degrees and the ordering on V are updated accordingly. (This preliminary stage is performed in $O(\deg(v))$ time. As a result, the degree of v becomes less than $2|V|$.) Then we make at most $\deg(v)$ splittings at v .

More precisely, at a current step of the iteration, we choose an arc entering v and an arc leaving v , say, $e = (u, v)$ and $e' = (v, w)$. If e or e' is a loop, we simply delete it from G . Otherwise define $\epsilon := \min\{f(e), f(e')\}$. The *splitting-off operation* applied to (e, v, e') creates a new arc e'' from u to w , assigns $f(e'') := \epsilon$, updates $f(e) := f(e) - \epsilon$ and $f(e') := f(e') - \epsilon$, and deletes from G the arc (or arcs) for which the new value becomes zero; it takes $O(1)$ time. The ordering on V is updated accordingly (in $O(1)$ time). Clearly the operation maintains both the divergency at each node and the flow integrality (when the original flow is integer). Also $\text{div}(v)$ decreases and the number of all arcs does not increase.

At the next step of the iteration, the operation is applied to another pair of arcs, one entering and the other leaving v , and so on until such pairs no longer exist. After that, if $v \notin S \cup T$, then v is removed from G (as $\text{div}_f(v) = 0$ implies $\deg(v) = 0$).

At the next iteration, we again choose a vertex where the current degree is minimum, and so on. One can see that after $|V|$ iterations, each arc of the resulting graph $\overline{G}$ goes from a source $s \in S$ to a sink $t \in T$. The decomposition $\overline{D} = \{f_{st} : st \in \Pi\}$ for the resulting f in $\overline{G}$ is trivial: $f_{st}(s, t) := f(s, t)$ and $f_{st}(e) := 0$ for $e \neq (s, t)$ (letting $f_{st} \equiv 0$ if the arc (s, t) does not exist in $\overline{G}$).

Now going in the reverse order and applying the corresponding *restoration procedure* reverse to the splitting-off one, we transform $\overline{D}$ into the desired decomposition of the initial flow. More precisely, consider a current graph G and the arcs $e = (u, v)$, $e' = (v, w)$, $e'' = (u, w)$ as above, and let f_{st} , $st \in \Pi$, be the flows already obtained

for the graph G' formed from G by the splitting-off operation w.r.t. (e, v, e') . For each $st \in \Pi$, add $f_{st}(e'')$ to $f_{st}(e)$ and to $f_{st}(e')$ and then delete e'' . (The backward iteration concerning v finishes with restoring the corresponding tuples of parallel arcs incident with v and assigning, in a due way, the flows f_{st} on these arcs.) Eventually, we obtain the desired decomposition $\{f_{st} : st \in \Pi\}$ of the initial f . (Strictly speaking, we have $g := \sum_{st} f_{st} \leq f$ and $\text{div}_{f-g}(v) = 0$ for all $v \in V$; so one should add the circulation $f - g$ to one of the flows f_{st} .)

Next we estimate complexity of the above algorithm. Let $v_1, v_2, \dots, v_{|V|}$ be the sequence of nodes in the splitting-off process. Since $|\Pi| = O(1)$, the restoration process is only $O(1)$ times slower than the splitting-off one. (This is just where we essentially use the condition that f has $O(1)$ terminals.) Using this fact, one can conclude that the algorithm runs in $O(E + \Delta)$ time for the initial E , where $\Delta := \deg^*(v_1) + \dots + \deg^*(v_{|V|})$ and $\deg^*(v)$ denotes the degree of v at the beginning of splitting at v . Each iteration i in the former process does not increase the number of arcs of the current graph and decreases the number of nodes by one, unless $v_i \in S \cup T$. So $\deg^*(v_{i+1})$ is at most $2|E|/(|V| - i)$. Summing up the latter numbers over i , we obtain $\Delta = O(E \log V)$, which is worse than the time bound in Theorem 5.1.

However, we can estimate Δ more carefully, by using the inequality $\deg^*(v_i) < 2(|V| - i + k + 1)$ (provided by merging parallel arcs incident with v_i). For any integer $1 \leq \lambda \leq |V|$, apply the first bound on $\deg^*(v_i)$ for $i = 1, \dots, |V| - \lambda$, and the second bound for $i = |V| - \lambda + 1, \dots, |V|$. This gives

$$\Delta \leq 2|E| \left(\frac{1}{|V|} + \frac{1}{|V| - 1} + \dots + \frac{1}{\lambda + 1} \right) + 2\lambda(\lambda + k),$$

or $\Delta = O(E \log(V/\lambda) + \lambda^2)$. Now taking $\lambda := \min\{|V|, \lceil \sqrt{|E|} \rceil\}$, we obtain $\Delta = O(E \log(2 + V^2/E))$, and the theorem follows.

6 Fast Skew-Symmetric Flow Decomposition

In this section Theorem 5.1 is extended to (skew-)symmetric flows. For a fixed $k \in \mathbb{Z}_+$, we consider the problem:

(DS) *Given an integer symmetric flow f from $S = \{s_1, \dots, s_k\}$ to $S' = \sigma(S)$ in a skew-symmetric graph $G = (V, E)$, find a decomposition of f of the form*

$$(21) \quad f = \sum_{1 \leq i \leq j \leq k} (f_{ij} + f'_{ij}),$$

where each f_{ij} is an integer flow from s_i to s'_j and f'_{ij} is symmetric to f_{ij} .

Note that f'_{ij} is a flow from s_j to s'_i . So in the above decomposition, for $i, j \in \{1, \dots, k\}$, s_i and s'_j are connected by the only flow f_{ij} if $i < j$, by only f'_{ji} if $i > j$, and by the two flows f_{ii} and f'_{ii} if $i = j$. We show the following

Theorem 6.1 *(DS) can be solved in $O(E \log(2 + V^2/E))$ time.*

This generalizes Theorem 5.1 for integer flows because a digraph D with an integer S – T flow g is turned into a skew-symmetric graph with an integer symmetric $(S \cup T')$ – $(S' \cup T)$ flow by adding a disjoint copy of the reverse to D with the flow reverse to g in it.

Our algorithm to solve (DS) relies on the following lemma (where, as before, primes are used for the corresponding mate objects).

Lemma 6.2 *Let g be a (not necessarily symmetric) half-integer flow from S to T in a skew-symmetric graph $G = (V, E)$ such that $\text{div}_g(v)$ is an integer for each $v \in V$. Let $g + g'$ be integer. Then there exists, and can be found in $O(E)$ time, an integer flow h in G such that $h + h' = g + g'$ and $\text{div}_h(v) = \text{div}_g(v)$ for all $v \in V$.*

Proof. Let E_0 be the set of arcs e with $g(e) \notin \mathbb{Z}$. The integrality of $g + g'$ implies $E'_0 = E_0$, so the subgraph $\langle E_0 \rangle$ induced by E_0 is skew-symmetric. Also the half-integrality of g and the integrality of div_g imply that each node is incident with an even number of arcs in E_0 . So the underlying undirected graph H of $\langle E_0 \rangle$ is Eulerian.

We grow a (simple) path P in $\langle E_0 \rangle$ such that $P \cap P' = \emptyset$, starting with an arbitrary node v_0 and allowing backward arcs in P . Let v be the last node of the current P , and choose an arc $e \in E_0$ incident with v and different from the last arc of P (e exists as H is Eulerian). Let u be the end of e different from v . Three cases are possible. (i) If both u, u' are not in P , we increase P by adding e, u , and continue the process. (ii) If $u \in P$, we remove the part of P from u to v , obtaining the new current path from v_0 to u , and add e to the removed part, forming circuit C (with possible backward arcs). (iii) If $u' \in P$, we remove the part Q of P from u' to v , obtaining the new current path, and add e, Q' and e' to Q , forming circuit C (which is reverse to C').

In case (ii), we update g by pushing half-unit along C (i.e., by setting $g(a) := g(a) + \frac{1}{2}$ for the forward arcs a in C , and $g(a) := g(a) - \frac{1}{2}$ for the backward arcs a) and by pushing half-unit along the circuit reverse to C' . Accordingly, we update g' by pushing half-unit along C' and along the circuit reverse to C . And in case (iii), g (g') is updated by pushing half-unit along C (resp. C'). In both cases, the new g' is symmetric to the new g and each of the functions $g + g'$ and div_g preserves. Also E_0 decreases by the set of arcs occurring in $C \cup C'$, and the new H is Eulerian. We continue the process with the new P .

The final g, g' give the desired h, h' . The bound $O(E)$ is obvious. ■

Return to problem (DS). Add to G new nodes t, t' and arcs (t, s_i) and (s'_i, t') , forming skew-symmetric graph G_1 , and extend f to an IS-flow from t to t' in G_1 in a natural way. The fact that f is integer and symmetric implies that $\text{div}_f(t)$ is even.

So we can apply Lemma 6.2 to the flows $g := g' := \frac{1}{2}f$, obtaining corresponding integer flows h, h' . The restriction $\bar{h}$ of h to E is an integer flow from S to S' , and we apply the $O(E \log(2 + V^2/E))$ -algorithm from Section 5 to decompose it as

$$\bar{h} = \sum_{1 \leq i, j \leq k} h_{ij},$$

where h_{ij} is an integer flow from s_i to s'_j . Then the flows $f_{ii} := h_{ii}$ for $i = 1, \dots, k$, and $f_{ij} := h_{ij} + h'_{ji}$ for $1 \leq i < j \leq k$ are as required, and Theorem 6.1 follows.

Remark. The above proof involves the following corollary from Lemma 6.2.

Corollary 6.3 *Let f be an IS-flow from S to S' in a skew-symmetric graph $G = (V, E)$ (where $|S|$ is not fixed), and let $\text{div}_f(v)$ be even for all $v \in V$. Then there exists, and can be found in $O(E)$ time, an integer flow g from S to S' such that $f = g + g'$ and $\text{div}_f(v) = 2\text{div}_g(v)$ for all $v \in V$.*

References

- [1] B.V. Cherkassky, A solution of a problem on multicommodity flows in a network, *Ekonomika i Matematicheskie Metody* **13** (1) (1977) 143–151, in Russian.
- [2] J. Edmonds and E. L. Johnson, Matching, a well-solved class of integer linear programs, In: R. Guy, H. Haneni, and J. Schönhein, eds, *Combinatorial Structures and Their Applications*, Gordon and Breach, NY, 1970, pp. 89–92.
- [3] L.R. Ford and D.R. Fulkerson, *Flows in Networks*, Princeton Univ. Press, Princeton, 1962.
- [4] S. Fortune, J. Hopcroft, and J. Wyllie, The directed subgraph homeomorphism problem, *Theoretical Computer Sci.* **10** (1980) 111–121.
- [5] A. Frank, On connectivity properties of Eulerian digraphs, *Ann. Discrete Math.* **41** (1989) 179–194.
- [6] H.N. Gabow, An efficient reduction technique for degree-constrained subgraph and bidirected network flow problems, *Proc. of STOC* **15** (1983) 448–456.
- [7] A.V. Goldberg and A.V. Karzanov, Path problems in skew-symmetric graphs, *Combinatorica* **16** (1996) 129–174.
- [8] A.V. Goldberg and A.V. Karzanov, Maximum skew-symmetric flows and matchings, *Mathematical Programming* **100** (3) (2004) 537–568.
- [9] Goldberg, A.V., and R.E. Tarjan [1988], A new approach to the maximum flow problem, *J. ACM* **35** 921–940.
- [10] T. Ibaraki, A.V. Karzanov, and H. Nagamochi, A fast algorithm for finding a maximum free multiflow in an inner Eulerian network and some generalizations, *Combinatorica*, **18** (1) (1998) 61–83.
- [11] A.V. Karzanov, Fast algorithm for solving two known problems on undirected multicommodity flows, In: *Combinatorial Methods for Flow Problems* (Inst. for System Studies, Moscow, iss. 3), pp. 96–103, in Russian.

- [12] V.L. Kupershtokh, A generalization of Ford-Fulkerson theorem to multiterminal networks, *Kibernetika* **7** (3) (1971) 87-93, in Russian [translated in *Cybernetics* **7** (3) (1973) 494-502].
- [13] E.L. Lawler, *Combinatorial Optimization: Networks and Matroids*, Holt, Reinhart, and Winston, NY, 1976.
- [14] M.V. Lomonosov, Combinatorial approaches to multiflow problems, *Discrete Applied Math.* **11** (1) 1-94.
- [15] L. Lovász, On some connectivity properties of Eulerian graphs, *Acta Math. Akad. Sci. Hung.* **28** 129-138.
- [16] L. Lovász, Matroid matching and some applications, *J. Combinatorial Theory*, Ser. B, **28** (1980) 208–236.
- [17] W. Mader, Über die Maximalzahl kantendisjunkter A-Wege, *Archiv der Mathematik (Basel)* **30** (1978) 325–336.
- [18] A. Schrijver, *Combinatorial Optimization*, vol. A. Springer, Berlin, 2003.
- [19] D.D. Sleator and R.E. Tarjan, A data structure for dynamic trees, *J. Comput. Syst. Sci.* **26** (3) (1983) 362–391.
- [20] W.T. Tutte, Antisymmetrical digraphs, *Canadian J. Math.* **19** (1967) 1101–1117.